


LAYOUT FOR RESIDENTIAL CONSTRUCTION OF
CURB, GUTTER, SIDEWALK AND DRIVEWAY

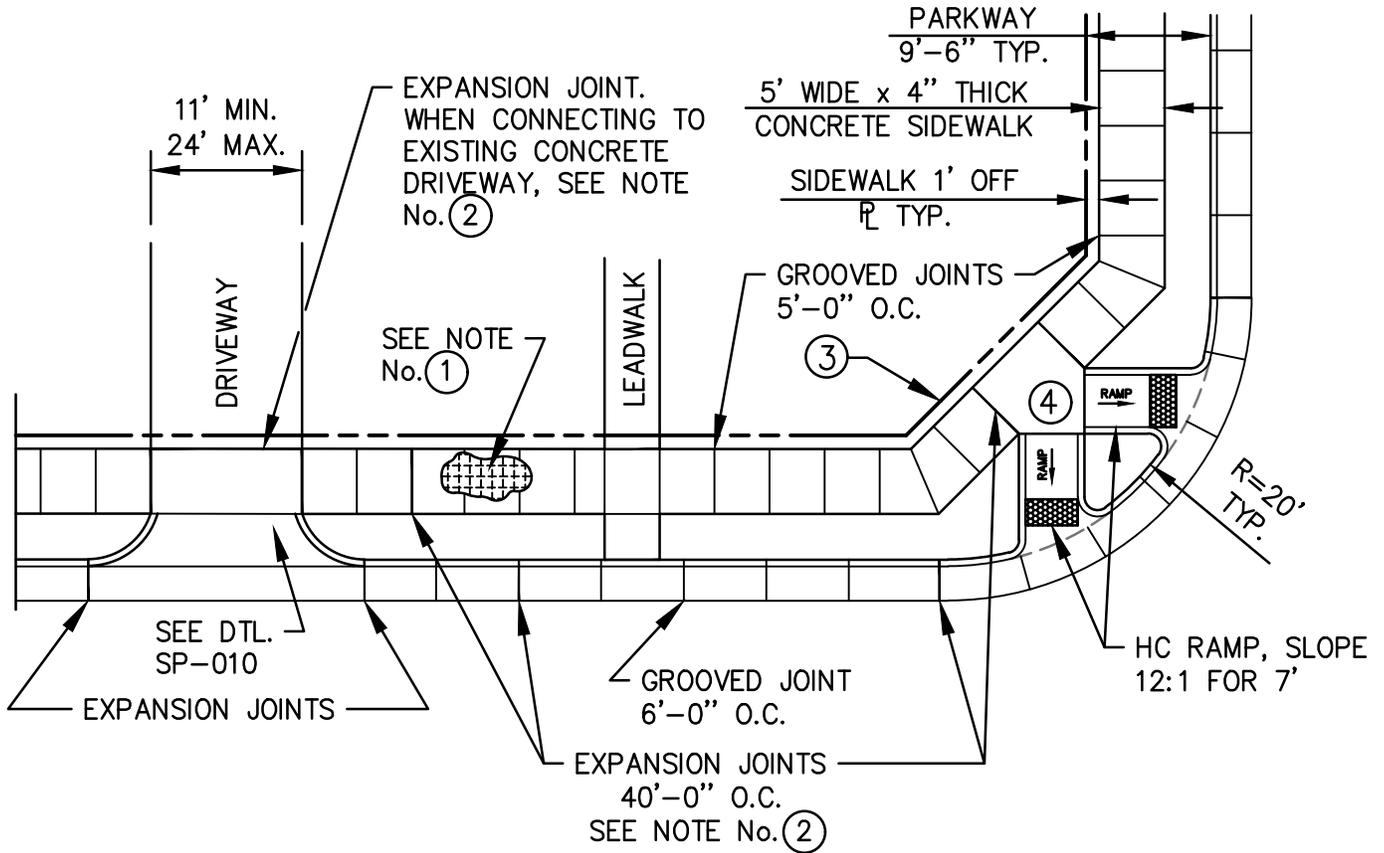


NOTES:

- ① #3 BARS AT 18" CENTER TO CENTER EACH WAY.
- ② DOWEL WITH 24" LONG #4 BARS ON 12" CENTERS, EXTEND 12" THRU EXPANSION JOINTS. EXTEND 12" INTO EXISTING CONCRETE WHEN CONNECTING TO EXISTING CONCRETE.
- ③ PROVIDE RIGHT-OF-WAY CORNER CLIP TO ALLOW ROOM FOR LANDING AND DIRECTIONAL RAMPS (MINIMUM 15').
- ④ PROVIDE MINIMUM 5' SQUARE LANDING AT TOP OF RAMPS WITH CROSS-SLOPE OF 2% OR LESS IN ALL DIRECTIONS.

FEBRUARY 2018

NOT TO SCALE

REVISIONS:

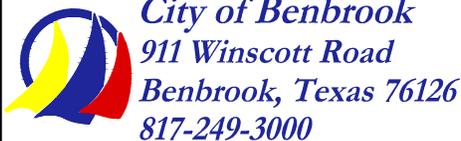

RESIDENTIAL
SIDEWALK & DRIVEWAY
SP-004