


CONCRETE PAVING TRANSITION

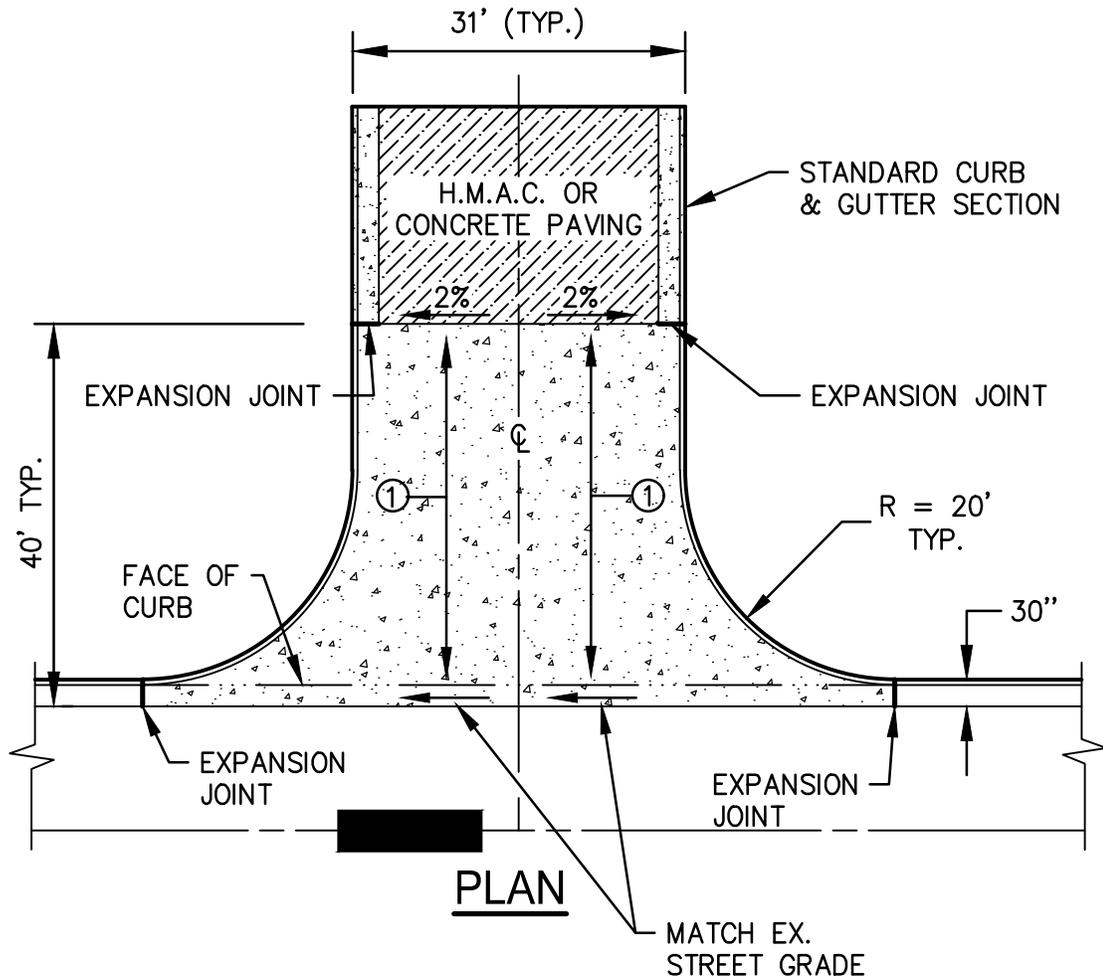


NOTES:

1. TRANSITION CROSS-SLOPE UNIFORMLY BETWEEN EXISTING STREET GRADE AND TYPICAL SECTION OVER 40'.
2. GUTTER TO BE SHAPED TO CONFORM WITH CONCRETE PAVEMENT
3. CURB & GUTTER TOP BE PLACED MONOLITHICALLY.
4. CONCRETE SHALL BE A MINIMUM OF 6 SACK DESIGN WITH A 28 DAY COMPRESSIVE STRENGTH OF 3600 PSI.

FEBRUARY 2018

NOT TO SCALE

REVISIONS:

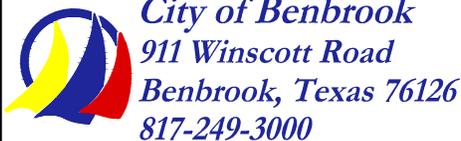

**CONCRETE PAVING
TRANSITION
SP-013**