


NOTE:

SAW CUT FULL DEPTH OF EXISTING PAVEMENT.

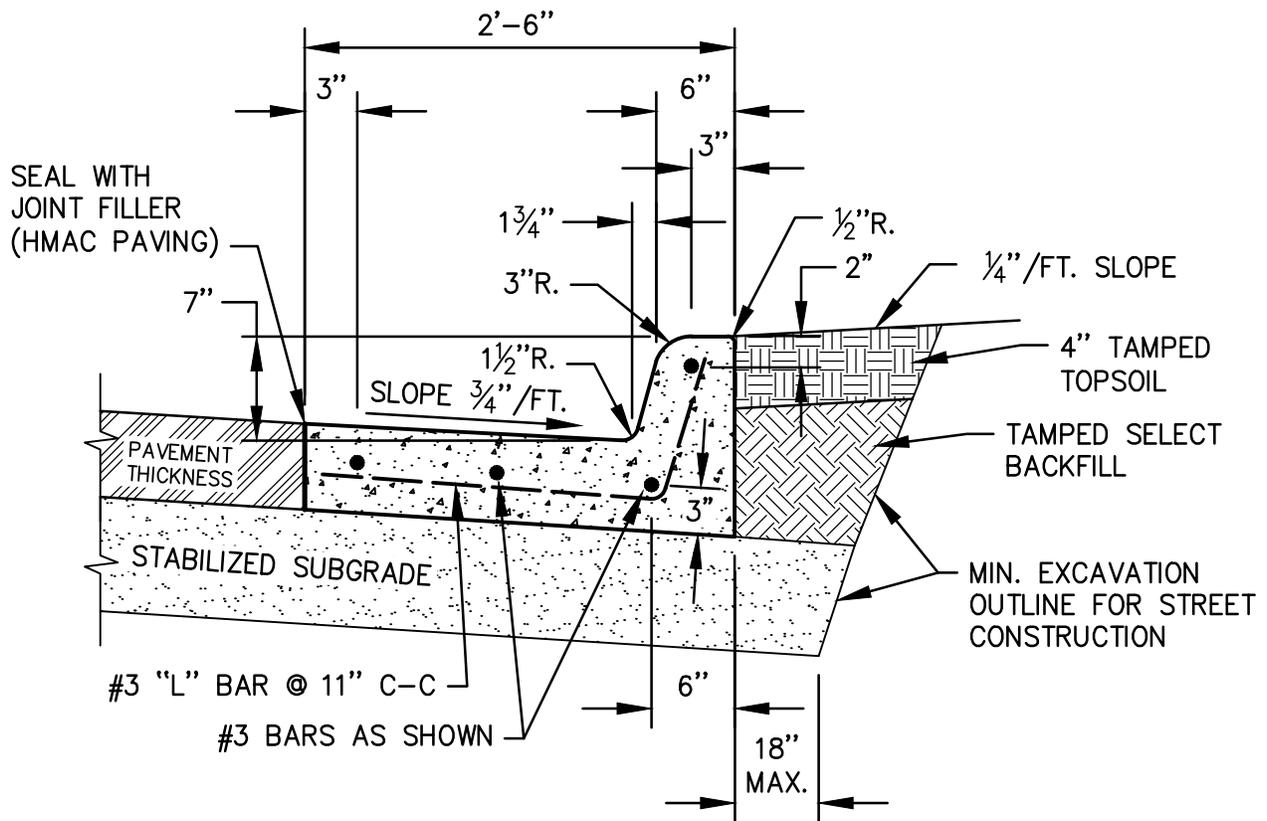


NOTES:

1. CURB & GUTTER IS TO BE PLACED MONOLITHICALLY WITH CONCRETE PAVING.
2. CONCRETE SHALL HAVE A 28 DAY COMPRESSIVE STRENGTH OF 3600 PSI.

FEBRUARY 2018

NOT TO SCALE

REVISIONS:

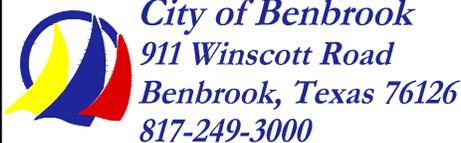

COMBINATION
CURB & GUTTER
SP-014